


螺纹刀片

Threading Inserts

立装型 - ISO


Vertical Threading Insert - ISO

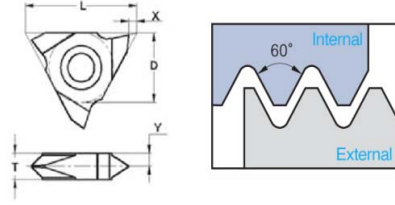

型号 Type		螺距 Pitch	尺寸 (mm)					钢件 P	不锈钢 M	有色金属 N
			MM	D	L	X	Y	T	UPS253	UPG20B
VETR 16-0.5 ISO	VETL 16-0.5 ISO	0.50	9.525	16	1.1	3.00	3.6	★	★	★
VETR 16-0.75 ISO	VETL 16-0.75 ISO	0.75	9.525	16	1.1	3.00	3.6	★	★	★
VETR 16-1.0 ISO	VETL 16-1.0 ISO	1.00	9.525	16	1.1	2.90	3.6	★	★	★
VETR 16-1.25 ISO	VETL 16-1.25 ISO	1.25	9.525	16	1.1	2.70	3.6	★	★	★
VETR 16-1.5 ISO	VETL 16-1.5 ISO	1.50	9.525	16	1.1	2.60	3.6	★	★	★
VETR 16-1.75 ISO	VETL 16-1.75 ISO	1.75	9.525	16	1.1	2.45	3.6	★	★	★
VETR 16-2.0 ISO	VETL 16-2.0 ISO	2.00	9.525	16	1.1	2.30	3.6	★	★	★
VETR 16-2.5 ISO	VETL 16-2.5 ISO	2.50	9.525	16	1.1	2.10	3.6	★	★	★
VETR 16-3.0 ISO	VETL 16-3.0 ISO	3.00	9.525	16	1.1	2.00	3.6	★	★	★

立装型 - 惠氏螺纹

Vertical Threading Insert - Whitworth

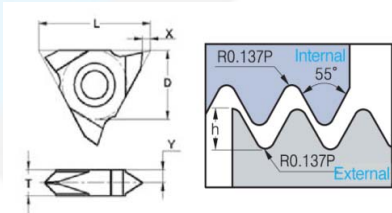

型号 Type		螺距 Pitch	尺寸 (mm)					钢件 P	不锈钢 M	有色金属 N
			TPI	D	L	X	Y	T	UPS253	UPG20B
VETR 16-19 W	VETL 16-19 W	19	9.525	16	1.1	2.70	3.6	★	★	★
VETR 16-18 W	VETL 16-18 W	18	9.525	16	1.1	2.60	3.6	★	★	★
VETR 16-16 W	VETL 16-16 W	16	9.525	16	1.1	2.60	3.6	★	★	★
VETR 16-14 W	VETL 16-14 W	14	9.525	16	1.1	2.40	3.6	★	★	★
VETR 16-12 W	VETL 16-12 W	12	9.525	16	1.1	2.40	3.6	★	★	★
VETR 16-11 W	VETL 16-11 W	11	9.525	16	1.1	2.10	3.6	★	★	★
VETR 16-10 W	VETL 16-10 W	10	9.525	16	1.1	2.10	3.6	★	★	★
VETR 16-9 W	VETL 16-9 W	9	9.525	16	1.1	2.10	3.6	★	★	★
VETR 16-8 W	VETL 16-8 W	8	9.525	16	1.1	1.90	3.6	★	★	★

★ 主推牌号 Recommended Grade

可选牌号 Optional Grade